SPG

UTG21-S Ultrasonic Level Transmitter

Specifications

Measuring range	0-8m
Blind area	0.35m
Ranging accuracy	0.3% (Standard condition)
Ranging resolution	1mm
Supply voltage	DC24V/AC220V
Output	4~20mA
Protection grade	IP65
Ambient temperature	-20℃~+60℃
Pressure	Less than four atmospheric pressure

Dimensions Drawings

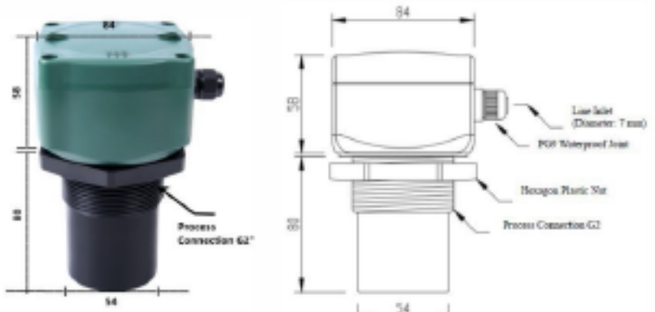

Working Site

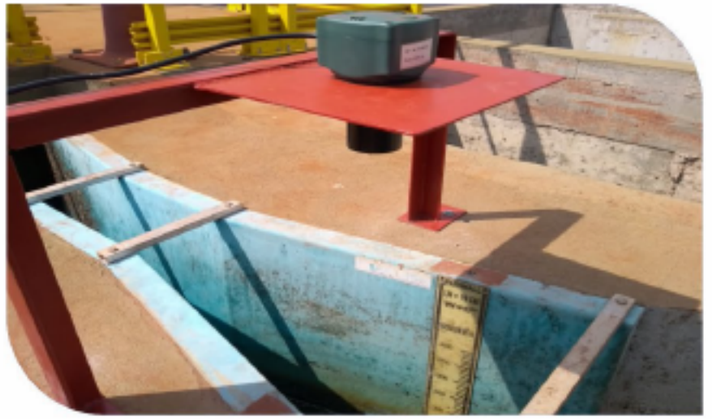

UTG21

Item	Model	Protection class		Installation method		Wire system		Com munication interface			
		Waterproof type	Explosion-proof	Integrated	Remoted	Two-wire system	Three/Four-wire system	4-20mA	RS485	Hart	GPRS
"Ultrasonic Level Transmitter"	UTG21-H	●	○	●		●		●		○	
	UTG21-B(E)	●	○	●	○	●	●	●	●		
	UTG21-R	●		●			○	●	○	○	
	UTG21-PY	●		●		●	○	●	○		○
	UTG21-K	●		●		●	○	●	○		
	UTG21-S	●		●			●	●	○		
	UTG21-PR	●					●	●	●	○	○
	UTG21-PS	●					●	●	●		

● Standard Accessories ○ Optional Accessories